

Tips & Techniques:

Programming Plus Model Phones

Sentry Plus (ET201, ET201A)
Liberator Plus (ET201A-LP)
Commander Plus (ET201-OEM, ET201A-OEM, ET201-OEMCS, ET201A-OEMCS)
Fortress Plus (ET1201, ET1201A, ET1201-MPB, ET1201A-MPB)




Tools Needed

Only requires tools to access telephone circuit board - no tools required for actual programming

Serial numbers 207200 - present

1. Verify that a working telephone line is connected to the screw terminals marked PHONE LINE. Also verify TIP and RING polarity. (see *Tips & Techniques: Telephone Line Measures*)
2. Determine the number to be dialed. If a "9" is required to access an outside line, it is recommended to insert a 4 second "Pause" before entering the rest of the telephone number.
3. Program number as follows:
 1. Place PROGRAM/ONLINE switch to PROGRAM position
 2. Press the activating push-button
 3. Press STORE, then MEM, then "0"
 4. Enter the emergency telephone number to be dialed
 5. Press STORE
 6. Press the RESET button to shut the K-phone off
 7. Place PROGRAM/ON-LINE switch to ON-LINE
4. Verify that the correct number was stored by pressing the activating push-button. The phone should automatically dial and complete the call. Have the called party hang up; the phone should shut off.

Please note: If you have any further questions or problems, please feel free to call for Customer Support.

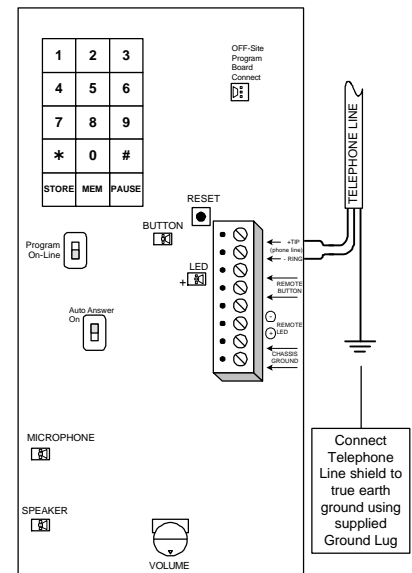

K-Tech International, Inc.

56 Ella Grasso Avenue • P.O. Box 1025
Torrington Connecticut 06790 USA

1-800-993-9399

(860) 489-9399 • Fax: (860) 489-4399


Internet: www.ktechonline.com

Sales: sales@ktechonline.com • Support: support@ktechonline.com

Serial numbers 24700 - 200525; 200600 - 207188

1. Verify that a working telephone line is connected to the screw terminals marked PHONE LINE. Also verify TIP and RING polarity. (see *Tips & Techniques: Telephone Line Measures*)
2. Determine the number to be dialed. If a "9" is required to access an outside line, it is recommended to insert a 3.5 second "Pause" before entering the rest of the telephone number.
3. Program number as follows:
 1. Place MEMORY BACK-UP switch to ON
 2. Place PROGRAM/ON-LINE switch to PROGRAM
 3. Enter desired number using the integrated keypad
 4. Place PROGRAM/ON-LINE switch to ON-LINE
4. Verify that the correct number was stored by pressing the activating push-button. The phone should automatically dial and complete the call. Have the called party hang up; the phone should shut off.


Please note: Memory loss could be caused by a low 3 Volt Lithium battery. Verify that the battery reads at least 2.7 VDC. If you have any further questions or problems, please feel free to call for Customer Support.

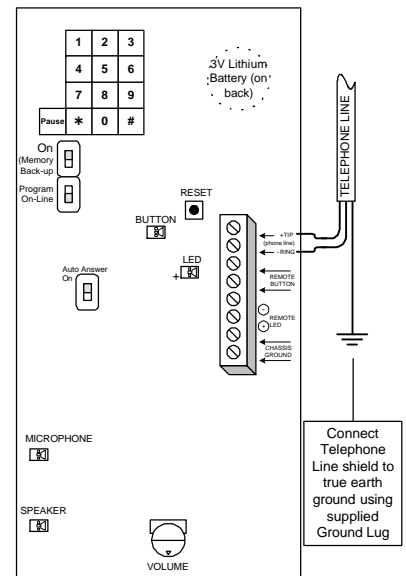

Serial numbers 20001 - 24606

1. Verify that a working telephone line is connected to the screw terminals marked PHONE LINE. Also verify TIP and RING polarity. (see *Tips & Techniques: Telephone Line Measures*)
2. Determine the dialing type, TONE or PULSE, and set the switch accordingly. Determine the number to be dialed. If a "9" is required to access an outside line, it is recommended to insert a 3.5 second "Pause" before entering the rest of the telephone number.
3. Program number as follows:
 1. Press activating push-button. **As soon as you hear dial tone, use the integrated keypad to enter only the first digit** of the number to be programmed
 2. Wait 5 seconds
 3. Enter the rest of the number
4. Programming the phone will place a call to the number entered. Have the called party hang up; the phone should shut off.
5. Verify that the correct number was stored by pressing the activating push-button. The phone should automatically dial and complete the call.

Please note: Memory loss could be caused by a low 3 Volt Lithium battery. Verify that the battery reads at least 2.7 VDC. If you have any further questions or problems, please feel free to call for Customer Support.

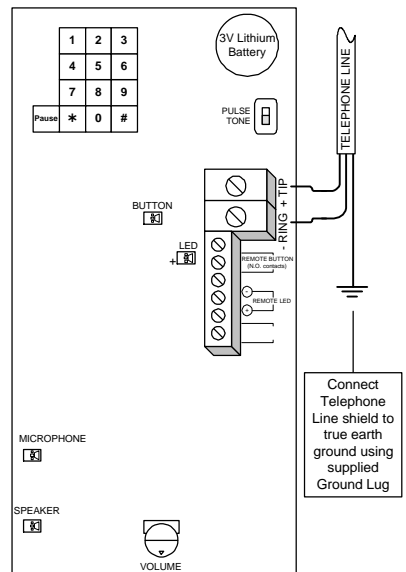

Posted 4/20/2000

The included documents have been designed to provide helpful hints, further explanation, and solutions to common product issues. If you are unable to find an answer or a solution within these documents, please feel free to contact K-Tech Customer Service by e-mail at support@ktechonline.com or by telephone at 1-800-993-9399 or (860) 489-9399 for further assistance.



K-Tech International, Inc.

56 Ella Grasso Avenue • P.O. Box 1025
Torrington Connecticut 06790 USA

1-800-993-9399

(860) 489-9399 • Fax: (860) 489-4399

Internet: www.ktechonline.com

Sales: sales@ktechonline.com • Support: support@ktechonline.com